



TOTAL INGENIEROS S.A.C

VENTAS, PROYECTOS, SERVICIOS EN INGENIERÍA Y SISTEMAS DE REFRIGERACIÓN

HONGSEN 鸿森

2021-2022


制冷空调系统配件

REFRIGERATION A/C SYSTEM ACCESSORIES

HONGSEN MACHINERY
Escort For Safe Refrigeration

REFRIGERATION A/C SYSTEM ACCESSORIES

制冷空调系统配件

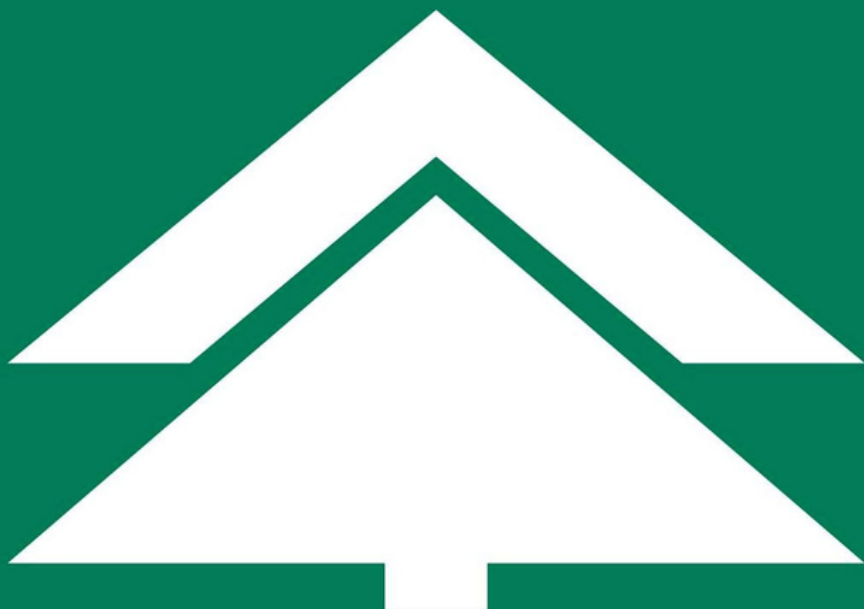

HONGSEN® 鸿森®

浙江鸿森机械有限公司
ZHEJIANG HONGSEN MACHINERY CO.,LTD
地址: 浙江省诸暨市店口镇制冷工业园区
Address: Diankou refrigeration industrial park, Zhuji city, Zhejiang province
电话 /Tel: 0575-87696107/0575-87607883/0575-87608106
传真 /Fax: 0575-87698985 PostCode:311802
E-mail: hongsen@zhsjx.com;hongsen6@zhsjx.com;zhongsen@163.com

HMG型高压毛细软管 接头类

Type HMG High Pressure Hose and Fittings

产品概述 Product Description
• HMG型高压软管是柔性连接件，主要用于冷冻、冷藏及空气调节装置的压缩机吸排气管。 • Type HMG hose is a flexible connection piece and it is mainly used as compressor suction and/or exhaust tube in the refrigeration, cold storage and air conditioning facilities.

造型表 Model Selection									
A		B		C					
D		E		F		G		H	
I		J		K		L		M	
N		O		P		Q		R	
S		T		U					

产品特点 Features	
• 采用优质尼龙、聚酯材料制作，产品耐高压、耐高温、耐老化性能强，内壁光滑，介质流速小。代替铜管焊接不牢固，容易震动失漏，无法维修，噪音大等缺点，而且节省系统连接时间，长度任意取舍，技术可靠性大大提高。 • Made of high quality nylon and polyester. High pressure resistance, high temperature resistance and high ageing resistance. Small flow resistance due to its smooth internal wall. Eliminate the shortcomings of copper tube such as soldering failure, leakage, noise and difficult service. Selectable length at ease and short the connection operation time, improve the technical reliability obviously.	
技术参数 Technical Parameters	
适用制冷剂 Applicable Refrigerant	HCFC and HFC
适用介质温度 Applicable Medium Temperature	-40℃~+100℃

造型表 Model Selection						
编号 Code	型号规格 Type	名称 Description	内径 ID	外径 OD	最大工作压力 MPa Max. Working Pressure MPa	爆破试验压力 MPa Blasting Test Pressure MPa
A	HS-HMG-2	高压软管 high pressure hose Φ2	Φ2.5	Φ5.6	5.5	30
B	HS-HMG-4	高压软管 high pressure hose Φ4	Φ3.4	Φ7.8	5.5	30
C	HS-HMG-8	高压软管 high pressure hose Φ8	Φ6.2	Φ10.5	4.2	20
D	Φ2.6×1/4"	弯芯90° 带纳子 90° bend core with 1/4" nut1/4"	Φ1.0	Φ2.6		
E	Φ2.6×Dg4	弯芯90° 带纳子Dg4 90° bend core with Dg4 nut	Φ1.0	Φ2.6		
F	φ2.6	直芯 straight core	Φ1.0	Φ2.6		
G	1/4"	纳子 1/4" 1/4" nut				
H	Dg4	纳子 Dg4 nut				
I	φ2.6	三通 (T型) Tee	Φ1.0	Φ2.6		
J	φ5.9×12.3	铝套 aluminum sleeve	Φ5.9	Φ8		
K	φ3.5×1/4"	弯芯90° 带纳子 1/4" 90° bend core with 1/4" nut	Φ1.7	Φ3.5		
L	φ3.5×Dg4	弯芯90° 带纳子Dg4 90° bend core with Dg4 nut	Φ1.7	Φ3.5		
M	φ3.5	直芯 straight core	Φ1.7	Φ3.5		
N	φ3.5	三通 (T型) Tee	Φ1.7	Φ3.5		
O	φ8×18	铝皮套 Aluminium sleeve	Φ8	Φ11		
P	φ6.3×3/8"	弯芯90° 带纳子 3/8" 90° bend core with 3/8" nut	Φ3.2	Φ6.3		
Q	Φ6.3	直芯 straight core	Φ3.2	Φ6.3		
R	3/8"	纳子 3/8" 3/8" nut				
S	Φ10.8×18	铝皮套 Aluminium sleeve	Φ10.8	Φ13.1		
T	1/4"	铜封环 copper seal ring				
U	3/8"	铜封环 copper seal ring				