



TOTAL INGENIEROS S.A.C

VENTAS, PROYECTOS, SERVICIOS EN INGENIERÍA Y SISTEMAS DE REFRIGERACIÓN

HONGSEN 鸿森

2021-2022


制冷空调系统配件

REFRIGERATION A/C SYSTEM ACCESSORIES

HONGSEN MACHINERY
Escort For Safe Refrigeration

REFRIGERATION A/C SYSTEM ACCESSORIES

制冷空调系统配件

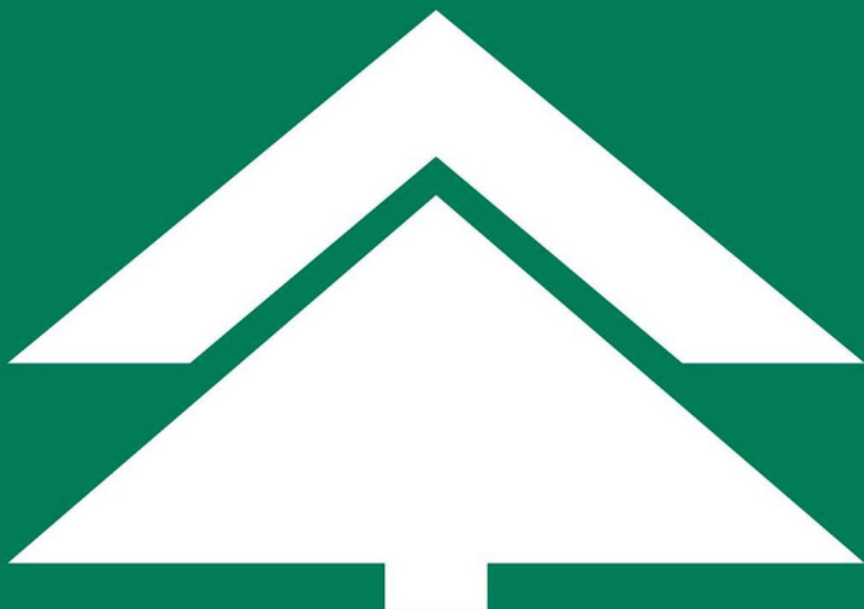

HONGSEN® 鸿森®

浙江鸿森机械有限公司
ZHEJIANG HONGSEN MACHINERY CO.,LTD
地址: 浙江省诸暨市店口镇制冷工业园区
Address: Diankou refrigeration industrial park, Zhuji city, Zhejiang province
电话 /Tel: 0575-87696107/0575-87607883/0575-87608106
传真 /Fax: 0575-87698985 PostCode:311802
E-mail: hongsen@zhsjx.com;hongsen6@zhsjx.com;zhongsen@163.com

HVD型活塞式电磁阀

Model HVD Piston Type Solenoid Valve



产品概述 Product Description	
• HVD型活塞式电磁阀是二次开启式电磁阀，适用于单向流动。 • HVD型活塞式电磁阀用于冷冻、冷藏和空气调节装置的液体、吸气和热气管路上。 • HVD型活塞式电磁阀可提供多种电压的线圈，而阀体是通用的。 • HVD型活塞式电磁阀可提供整体供货，也可分体供货，即阀体和线圈分开单独供货。	• Model HVH piston type solenoid valve is a twice open-type solenoid valve to be suitable to one-way flow. • Model HVH piston type solenoid valve is used on the liquid, air suction and hot vapor pipes of the refrigeration, cold storage and air conditioning facilities. • The coil of varies voltages is available for Model HVH piston type solenoid valve with a universal valve body. • Model HVH piston type solenoid valve could be supplied in whole or in split, that means valve body and coil could be supplied separately.
特点 Features	
• 专利线圈，防水性能好（IP65）。 • 应用新材料，耐高低温性能好。 • 24W的大功率电磁线圈，开阀能力大。 • 活塞行程大，工作流量大。 • 多种交流和直流电磁线圈可供选择。 • 焊接连接可达1-5/8in。	• The proprietary coil has perfect waterproof performance (IP65). • Using new material,it has performance in high and low temperature applicateion. • The 24W high-power solenoid coil has high capability to open the valve. • The high flow rate is assured by a big piston stroke. • Various AC and DC solenoid coils are available for choice. • 1-5/8 inch is the maximum welded connection size.
技术参数 Technical Parameters	
适用制冷剂 Applicable Refrigerants	HCFC or HFC(客户指定 Customer specified)
适用介质温度 Applicable Medium Temperature	-30℃~+105℃
线圈的适用环境温度 Application Ambient Temperature of Solenoid	-40℃~+65℃
线圈的标准电压 Standard Voltage of Solenoid	AC 380V,AC 220V/50Hz(也可按客户指定做 Customer design is available)
线圈的允许电压波动 Allowable Voltage Fluctuation for Solenoid	+10%~-15%
线圈的连接 Connection of Solenoid	3线插入式标准连接器 Standard 3-wire insert connector