



TOTAL INGENIEROS S.A.C

VENTAS, PROYECTOS, SERVICIOS EN INGENIERÍA Y SISTEMAS DE REFRIGERACIÓN

HONGSEN 鸿森

2021-2022


制冷空调系统配件

REFRIGERATION A/C SYSTEM ACCESSORIES

HONGSEN MACHINERY
Escort For Safe Refrigeration

REFRIGERATION A/C SYSTEM ACCESSORIES

制冷空调系统配件

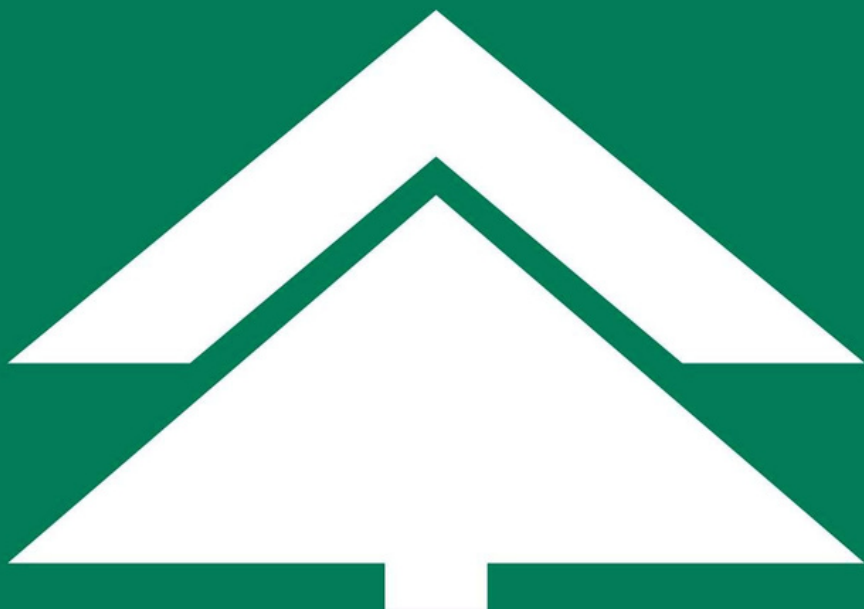

HONGSEN® 鸿森®

浙江鸿森机械有限公司
ZHEJIANG HONGSEN MACHINERY CO.,LTD
地址: 浙江省诸暨市店口镇制冷工业园区
Address: Diankou refrigeration industrial park, Zhuji city, Zhejiang province
电话 /Tel: 0575-87696107/0575-87607883/0575-87608106
传真 /Fax: 0575-87698985 PostCode:311802
E-mail: hongsen@zhsjx.com;hongsen6@zhsjx.com;zhongsen@163.com

DFS型干燥过滤筒

Model DFS Replaceable Dry Filter Cartridge



产品概述 Product Description	
• DFS型干燥过滤筒安装在系统的液、汽管路中，可有效去除残留的污染物，从而使压缩机得到更好的保护，延长其使用寿命。 • DFS型干燥过滤筒是可更换滤芯的，最大的特点是用于吸附压缩机马达烧毁后进入系统中大量的水分	• Model DFS dry filter cartridge is installed on the liquid and vapor piping, which could effectively remove any residual contaminant to protect compressor for a longer service life. • The filter element of Model DFS dry filter cartridge is replaceable and it is capable to absorb large amount of water in the system in case the compressor motor burns up.
产品特点 Features	
• 可拆式结构、便于安装及维修； • 100目出口滤网； • 全流通设计，最大限度的减少压降； • 钢制壳体，铜接管焊接口，高频焊接采用翻边结构，增加焊接可靠性； • 改性聚四氟乙烯新型材料，确保密封性； • 外涂层采用环氧树脂静电喷漆。	• Removable structure for convenient installation and maintenance; • 100 mesh outlet filter screen; • Full pass through design to minimize pressure drop; • Steel casing, copper pipe welded connection, high frequency welding flanging structure to improve welding reliability; • Modified Teflon new material to ensure perfect sealing; • Outer surface applies epoxy resin coating protection.
技术参数 Technical Parameters	
适用制冷剂 Suitable Refrigerants	HCFC、HFC、CFC
适用介质温度 Suitable Medium Temperature	-35℃~+70℃
最大工作压力 Maximum Working Pressure	4.2MPa
最大试验压力 Maximum Test Pressure	6.3MPa