



TOTAL INGENIEROS S.A.C
VENTAS, PROYECTOS, SERVICIOS EN INGENIERIA Y SISTEMAS DE REFRIGERACIÓN

Industrial Refrigeration Control Components



Dofun


Atlas For Selecting Models

山东东阀制冷科技有限公司
Shandong DoFun Refrigeration Technology Co., Ltd

山东东阀制冷科技有限公司

、技术参数 Technical Parameter

- ◆ 公称通径: DN3-DN50
Nominal Diameter: DN3-DN50
- ◆ 适用介质: R12,R22,R502,R134a,R404a,R507,R717等制冷剂。
Applicable Medium: R12,R22,R502,R134a,R404a,R507,R717 and
- ◆ 适用温度: -40℃~+105℃
Applicable Temperature: -40 °C ~ + 105 °C




DEVSC3-25系列
DEVSC3-25 Series




说明 Instruction

电磁阀是一种依靠电磁力自动开关的截止阀。在工业制冷装置中, 常用电磁阀作为遥控截止阀、双位调节系统的调节机关或安全保护设备。它可适用于各种气体、液体制冷剂等介质。


Solenoid Valve is kind of automatic stop valve that relies on Solenoid force. In industrial refrigeration installations, Solenoid Valves are commonly used as remote-control stop valves, two-position adjustment systems, or safety protection equipment. It is suitable for various gases, liquid refrigerants and other media.



DEVSC15-25系列
DEVSC15-25 Series




DEVSC32-40系列
DEVSC32-40 Series




订货 Order Goods

- ◆ 指定型号
Please tell us the model you want when ordering. DEVS20 It is means
- ◆ 例如DN20电磁阀(steel).
E.g.: DEVSC20
表示DN20电磁阀 (铜)
It means DN20 Solenoid Valve(copper).
DEVS20
表示DN20电磁阀 (钢)
It means DN20 Solenoid Valve(steel).





DEVSC32-50系列
DEVSC32-50 Series

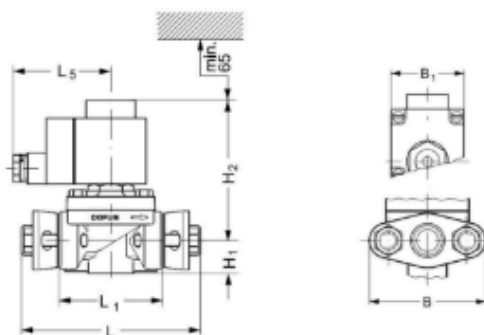


 DEVS15 DEVS20结构示意图
 DEVS15 DEVS20 Structure Diagram

型号 Model	H ₁ mm	H ₂ mm	H ₃ mm	L mm	L ₁ mm	L ₅ mm		B mm	B1 (max) mm	重量 Weight (KG)
						10w	12/20w			
DEV15	/	100	81	81	100	75	85	80	68	2.6
DEV20	/	110	77	77	110	75	85	75	68	4.7

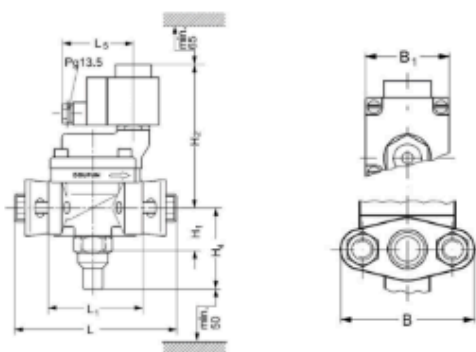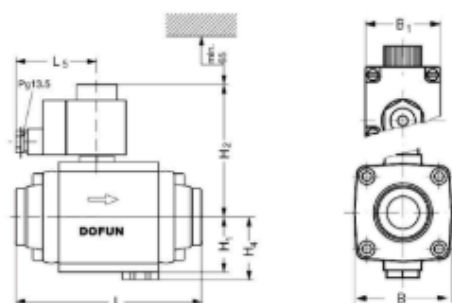
 DEVS25结构示意图
 DEVS25 Structure Diagram

 DEVS32 DEVS40 DEVS50结构示意图
 DEVS32 DEVS40 DEVS50 Structure Diagram

型号 Model	H ₁ mm	H ₂ mm	H ₃ mm	L mm	L ₁ mm	L ₅ mm		B mm	B1 (max) mm	重量 Weight (KG)
						10w	12/20w			
DEV25	46	141	78	162	92	75	75	95	68	4.6
DEV32	47	115	53	175		75	80	80	68	5
DEV40	47	115	53	175		75	80	80	68	4.5
DEV50	47	115	53	175		75	80	80	68	5