



TOTAL INGENIEROS S.A.C

VENTAS, PROYECTOS, SERVICIOS EN INGENIERÍA Y SISTEMAS DE REFRIGERACIÓN

HONGSEN 鸿森

2021-2022


制冷空调系统配件

REFRIGERATION A/C SYSTEM ACCESSORIES

HONGSEN MACHINERY
Escort For Safe Refrigeration

REFRIGERATION A/C SYSTEM ACCESSORIES

制冷空调系统配件

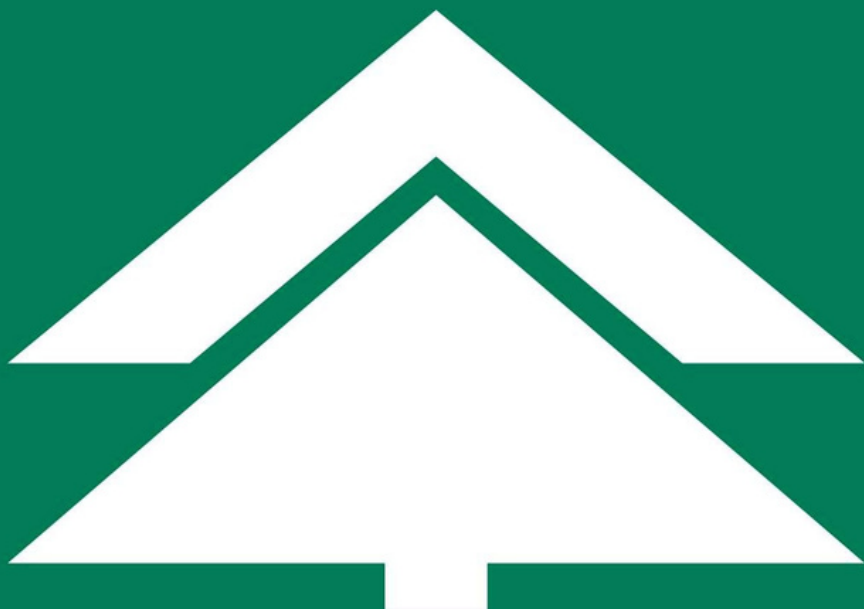

HONGSEN® 鸿森®

浙江鸿森机械有限公司
ZHEJIANG HONGSEN MACHINERY CO.,LTD
地址: 浙江省诸暨市店口镇制冷工业园区
Address: Diankou refrigeration industrial park, Zhuji city, Zhejiang province
电话 /Tel: 0575-87696107/0575-87607883/0575-87608106
传真 /Fax: 0575-87698985 PostCode:311802
E-mail: hongsen@zhsjx.com;hongsen6@zhsjx.com;zhongsen@163.com



产品概述 Product Description

- | | |
|--|---|
| <ul style="list-style-type: none">• SV型电磁阀是一次开启式或二次开启式电磁阀，适用于单向流动。• SV型电磁阀用于冷冻、冷藏和空气调节装置的液体、吸气和热气管路上。• SV型电磁阀的阀座与密封处具有很好的密封性。• SV型电磁阀可提供多种电压的线圈，而阀体是通用的。• SV型电磁阀可提供整体供货，也可分体供货，即阀体和线圈分开单独供货。 | <ul style="list-style-type: none">• Model SV solenoid valve is a once open-type or twice open-type solenoid valve to be suitable to one-way flow.• Model SV solenoid valve is used on the liquid, air suction and hot vapor pipes of the refrigeration, cold storage and air conditioning facilities.• Model SV solenoid valve has perfect sealing on its valve seat and sealing part.• The coil of varies voltages is available for Model SV solenoid valve with a universal valve body.• Model SV solenoid valve could be supplied in whole or in split, that means the valve body and coil could be supplied separately. |
|--|---|

特点 Features

- | | |
|---|---|
| <ul style="list-style-type: none">• 线圈为专利产品，整体密封设计；可有效防水，使用寿命长（IP65）。• 线圈在电压波动大的状况下也能正常工作。• 多种交直流电磁线圈可供选择。• 夹卡式电磁线圈拆卸安装方便。• 可用于冷冻、冷藏和空气调节装置的各种压缩机上。 | <ul style="list-style-type: none">• The proprietary coil is an entirely sealed design with an effective waterproof performance and a long service life(IP65).• The solenoidcoil could be operated properly even under unstable voltage.• Various AC and DC solenoid coils are available for choice.• Clip type solenoid coil is convenient in assembly and disassembly.• It is applicable to various compressors in the refrigeration,cold storage and air conditioning facilities. |
|---|---|

技术参数 Technical Parameters

适用制冷剂 Applicable Refrigerants	HCFC、HFC 及相应介质粘度 ≤2° E 润滑油HCFC、HFC and related medium viscosity ≤2° E lubricant oil
适用介质温度 Applicable Medium Temperature	-30℃~+105℃
线圈的适用环境温度 Application Ambient Temperature of Solenoid	-40℃~+65℃
线圈的标准电压 Standard Voltage of Solenoid	AC380V、220V、110V、24V/50、60Hz、DC12V
线圈的允许电压波动 Allowable Voltage Fluctuation for Solenoid	+10%~-15%
线圈的连接 Connection of Solenoid	3线插入式标准连接器 Standard 3-wire insert connector