



TOTAL INGENIEROS S.A.C


VENTAS, PROYECTOS, SERVICIOS EN INGENIERIA Y SISTEMAS DE REFRIGERACION




WEIGUANG




CCW

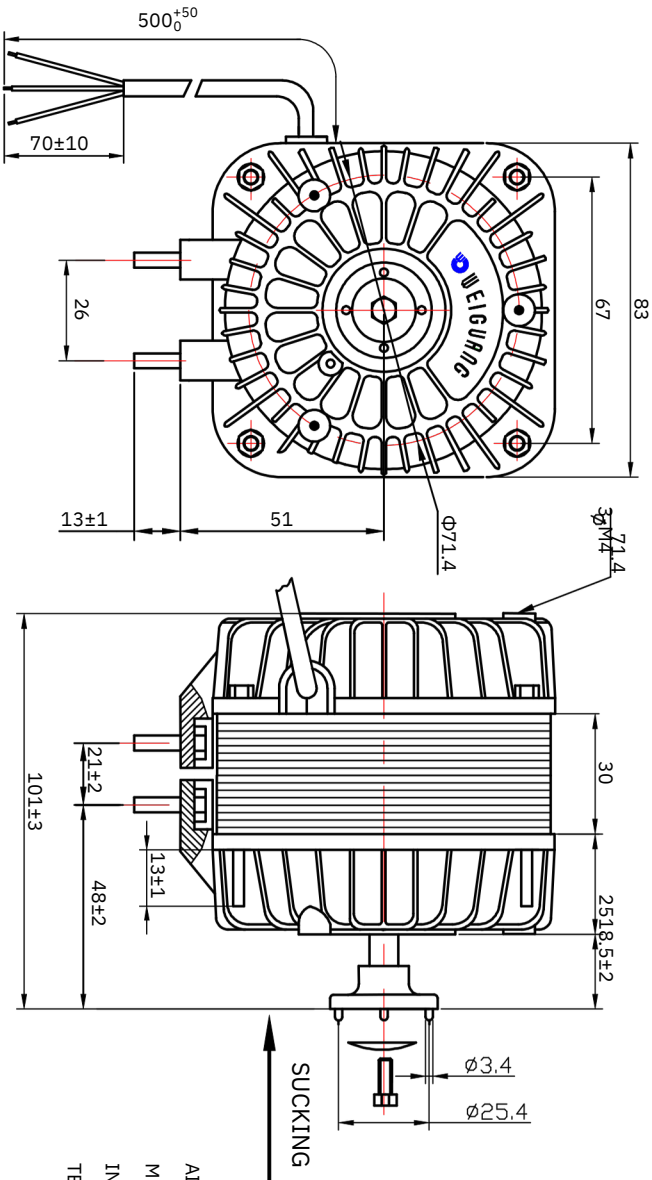

Wiring diagram 接线图

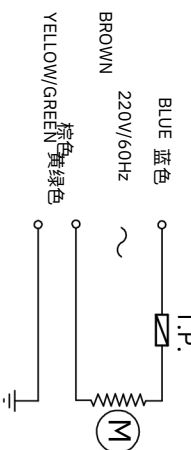

Label 铭牌

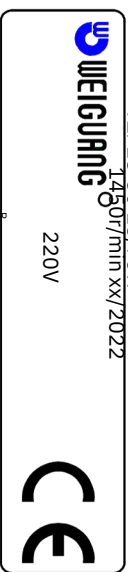

SPECIFICATION 规格说明

MOTOR TYPE 电机型号	Shaded pole motor 罩极电动机
MOTOR VOLTAGE 额定电压	230
MOTOR CURRENT 额定电流	YZF18-30
(Hz)	
(A)	0.55
INPUT POWER 输入功率 (W)	1450
ROTARY FREQUENCY 旋转频率	CCW (looking towards the shaft)
CURRENT BLADES	通过配不同扇叶实现吹吸风
	Φ254 / 31° (MAX)
AIRFLOW DIRECTION	热保护
MOTOR PROTECTION 电机保护方式	热保护
PROTECTION CLASS 保护等级	Class B
INSULATION CLASS 绝缘等级	IP 42
TEMPERATURE RISE	S1 连续工作制
AMBIENT TEMPERATURE 适用环境温度	垂直或水平安装
BEARINGS 轴承型式	Sleeve bearing 套油轴承
ELECTRICAL CONNECTION	RV 3G 0.5mm² lead wire 500-550mm free length 电源线长500-550mm, 型号: RV-90 3G 0.5mm²
HI-POT TEST 耐压测试	1800V历时1秒, 泄漏电流<=0.7mA 1800V/1s leakage<=0.7mA
WEIGHT PER UNIT	CE
APPROVALS 认证标记	12PCS/CTN 12台/箱

包装

CL.B

REV.	DESCRIPTION	APPROVED	DATE	SIGN	DATE	TITLE
				DRN.BY	SHENTAO09/06/2022	YZF18-30-26
				CHD.BY		
				ENG.BY		
				APP.BY		
						PROJECTION
						SCALE: 1:1
						SHEET: 1 of 1