





WEIGUANG



TOTAL INGENIEROS S.A.C
VENTAS, PROYECTOS, SERVICIOS EN INGENIERIA Y SISTEMAS DE REFRIGERACION

NO. 4D400B-2022-A0

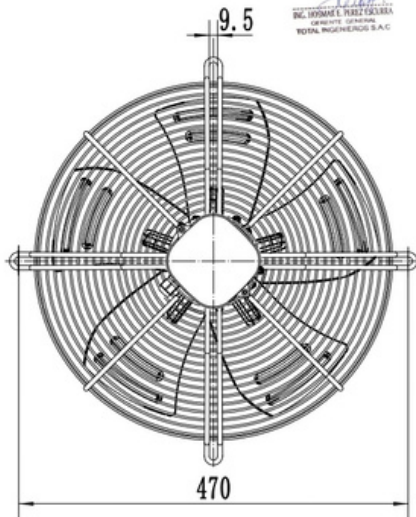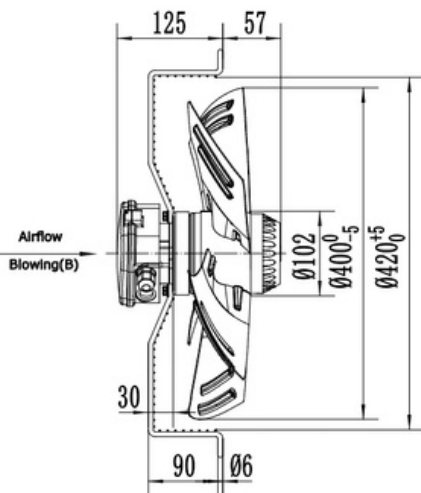

WEIGUANG
INC. 1000MET. PLAZA TOLUCA
CHILPANCA, MEXICO
TOTAL INGENIEROS S.A.C


WEIGUANG®

SPECIFICATION 规格说明
HANGZHOU WEIGUANG ELECTRONIC CO.,LTD.


LABEL (铭牌):

WEIGUANG® Axial Fan Motor
YWF4D-400B-102/47-G
△ 220V 60Hz 0.87A 150/250W 1520r/min
Y 380V 60Hz 0.50A 150/250W 1520r/min
Y 440V 60Hz 0.50A 140/250W 1620r/min
CL.F XX/XX

WIRING DIAGRAM (接线图):



FLOW RATE CURVE (风量曲线):

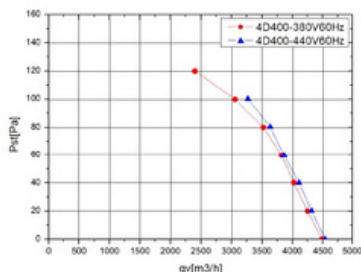

UNIT 类型	Axial fan motor 外转子轴流风机		
MOTOR 电机型式	Three phases motor		
MOTOR TYPE 电机型号	YWF4D-400B-102/47-G		
VOLTAGE 额定电压 (V)	△220	Y380	Y440
FREQUENCY 频率 (Hz)	60	60	60
INPUT POWER 输入功率 (W)	250	250	250
CURRENT 电流 (A)	0.87	0.50	0.50
SPEED 转速 (r/min)	1520	1520	1620
AIR FLOW 风量20Pa (m³/h)	4247	4247	4313
NOISE 噪音 (dBA)	68	68	68
ROTATION 旋转方向	CCW ,looking into the end-shield 逆时针, 从端盖端方向看		
INSULATION CLASS 绝缘等级	F		
MOTOR PROTECTION 电机保护	Thermocontact 150±5℃ 热保护器		
TEMPERATURE RISE 温升	75K max 运行温升不超过75K		
PROTECTION CLASS 防护等级	IP54		
OPERATING TYPE 工作定额	S1 连续工作制		
AMBIENT TEMPERATURE 适用环境温度	-30℃ +60℃		
BEARINGS 轴承型式	Ball bearings 滚珠轴承		
MOUNTING TYPE 安装方式	Horizontal or Vertical 垂直或水平安装		
ELECTRICAL CONNECTION 电源线	Lead wire 1330UL 7G 0.50mm²+2G 0.30mm², Length 100mm in terminal box connected 接线盒 (7芯0.5mm²+2芯0.3mm²线长100mm)		
APPROVALS 认证标记	CE		
NET WEIGHT/GROSS WEIGHT 净重/毛重	6.0/7.0kg		
PACKING 包装	43.5*43.5*20cm		

REV.	DESCRIPTION	APPROVED	DATE	DRN. BY	SIGN	DATE	TITLE
							YWF4D-400B-102/47-G
				CHD. BY			PROJECTION
				ENG. BY			A4
				APP. BY			SCALE
							SHEET: of