




WEIGUANG



TOTAL INGENIEROS S.A.C
VENTAS, PROYECTOS, SERVICIOS EN INGENIERIA Y SISTEMAS DE REFRIGERACION



NO. 4D600S-2022-A0

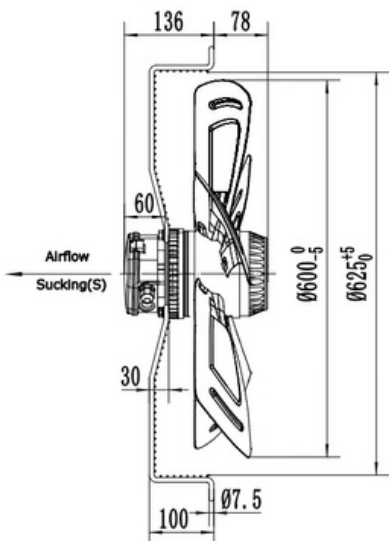


LABEL (铭牌):

WEIGUANG® Axial Fan Motor
YWF4D-600S-137/70-G
 Δ 220V 60Hz 2.51A 590/800W 1580r/min
 Y 380V 60Hz 1.45A 590/800W 1580r/min
 Y 440V 60Hz 1.46A 610/870W 1620r/min
 CL.F XX/XX

WIRING DIAGRAM (接线图):

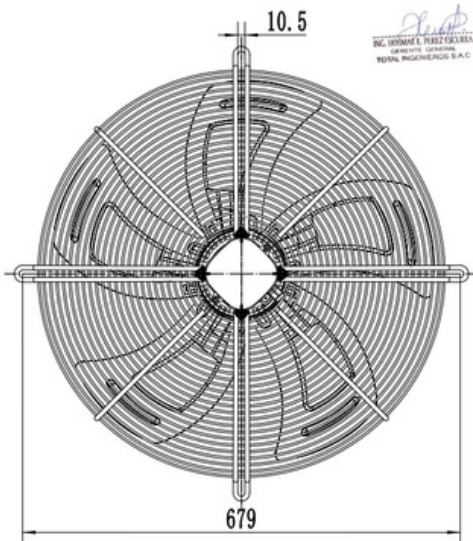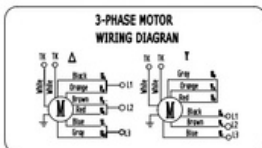

FLOW RATE CURVE (风量曲线):

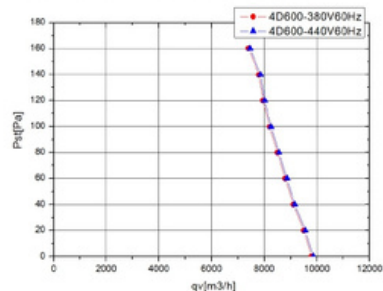

WEIGUANG®

SPECIFICATION 规格说明
HANGZHOU WEIGUANG ELECTRONIC CO.,LTD.

UNIT 类型	Axial fan motor		
MOTOR 电机型式	Three phases motor		
MOTOR TYPE 电机型号	YWF4D-600S-137/70-G		
VOLTAGE 额定电压 (V)	Δ220	Y380	Y440
FREQUENCY 频率 (Hz)	60	60	60
INPUT POWER 输入功率 (W)	800	800	870
CURRENT 电流 (A)	2.51	1.45	1.46
SPEED 转速 (r/min)	1580	1580	1620
AIR FLOW 20Pa 风量 (m³/h)	9500	9500	9560
NOISE 噪音 (dBA)	74	74	75
ROTATION 旋转方向	CW ,looking into the end-shield 顺时针, 从端盖端方向看		
INSULATION CLASS 绝缘等级	F		
MOTOR PROTECTION 电机保护	Thermocontact 150±5℃ 热保护器		
TEMPERATURE RISE 温升	75K max 运行温升不超过75K		
TYPE OF PROTECTION 防护等级	IP54		
OPERATING TYPE 工作定额	S1 连续工作制		
AMBIENT TEMPERATURE 适用环境温度	-30℃ +60℃		
BEARINGS 轴承型式	Ball bearings 滚珠轴承		
MOUNTING TYPE 安装方式	Horizontal or Vertical 垂直或水平安装		
ELECTRICAL CONNECTION 电源线	Lead wire 1330UL 7G 0.75mm²+2G 0.30mm², Length 100mm in terminal box connected 接线盒 (7芯0.75mm²+2芯0.3mm²线长100mm)		
APPROVALS 认证标记	CE		
NET WEIGHT/GROSS WEIGHT 净重/毛重	14.0/16.0kg		
PACKING 包装	63.5*63.5*23cm		

					DRN. BY	SIGN	DATE	TITLE
					CHD. BY			YWF4D-600S-137/70-G
					ENG. BY			PROJECTION
REV.	DESCRIPTION	APPROVED	DATE		APP. BY			
								A4 SCALE SHEET: of