



WEIGUANG





TOTAL INGENIEROS S.A.C
VENTAS, PROYECTOS, SERVICIOS EN INGENIERIA Y SISTEMAS DE REFRIGERACION

NO. 4D630S-2021-A0



WIGUANG ELECTRONIC CO., LTD.
HANGZHOU WIGUANG ELECTRONIC CO., LTD.

WEIGUANG®

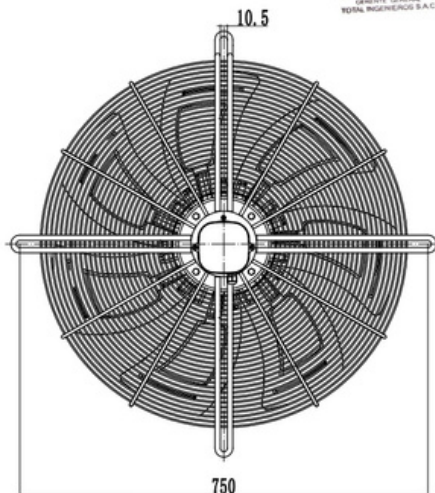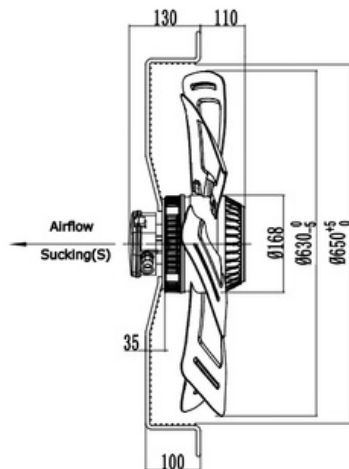
SPECIFICATION 规格说明
HANGZHOU WEIGUANG ELECTRONIC CO., LTD.

LABEL (铭牌):


WEIGUANG® Axial Fan Motor
YWF4D-630S-168/80-G
380V 50Hz 4.20A 1250/1900W 1400r/min
CL.F XX/XX



WIRING DIAGRAM (接线图):



FLOW RATE CURVE (风量曲线):

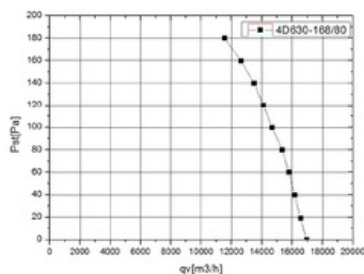

UNIT 类型	Axial fan motor 外转子轴流风机
MOTOR 电机型式	Three phases motor
MOTOR TYPE 电机型号	YWF4D-630S-168/80-G
VOLTAGE 额定电压 (V)	380
FREQUENCY 频率 (Hz)	50
INPUT POWER 输入功率 (W)	1900
CURRENT 电流 (A)	4.20
SPEED 转速 (r/min)	1400
AIR FLOW 风量20Pa (m³/h)	16548
NOISE 噪音 (dBA)	80
ROTATION 旋转方向	CW ,looking into the end-shield 顺时针, 从端盖端方向看
INSULATION CLASS 绝缘等级	F
MOTOR PROTECTION 电机保护	Thermocontact 150±5℃ 热保护器
TEMPERATURE RISE 温升	75K max 运行温升不超过75K
PROTECTION CLASS 防护等级	IP54
OPERATING TYPE 工作定额	S1 连续工作制
AMBIENT TEMPERATURE 适用环境温度	-30℃ +60℃
BEARINGS 轴承型式	Ball bearings 滚珠轴承
MOUNTING TYPE 安装方式	Horizontal or Vertical 垂直或水平安装
ELECTRICAL CONNECTION 电源线	Lead wire 1330UL 4G 1.31mm²+ 2G 0.35mm², Length 100mm in terminal box connected 接线盒 (4芯1.31mm²+2芯0.35mm²线长100mm)
APPROVALS 认证标记	CCC、CE
NET WEIGHT/GROSS WEIGHT 净重/毛重	25/28kg
PACKING 包装	68*68*27cm

REV.	DESCRIPTION	APPROVED	DATE	DRN. BY	SIGN	DATE	TITLE
				CHD. BY			YWF4D-630S-168/80-G
				ENG. BY			PROJECTION
				APP. BY			SCALE
							SHEET: of