





WEIGUANG



TOTAL INGENIEROS S.A.C
VENTAS, PROYECTOS, SERVICIOS EN INGENIERIA Y SISTEMAS DE REFRIGERACION

NO. 4E400S-2022-A0

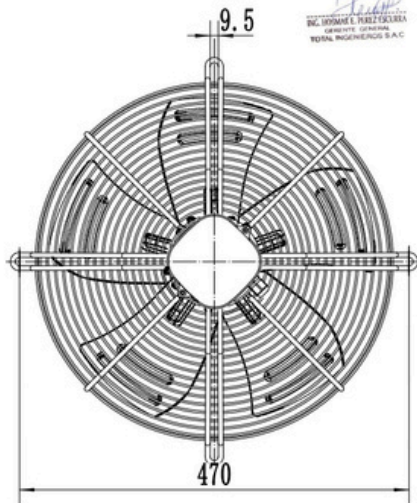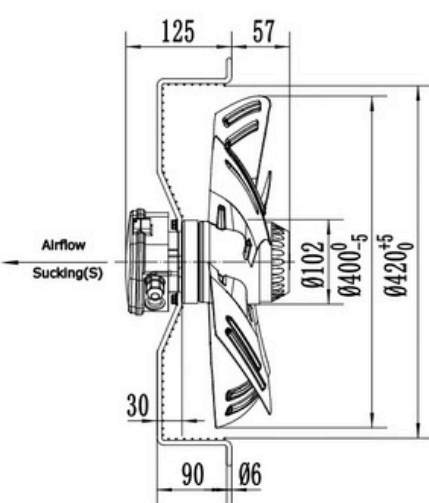

Shanghai
WUHAN L. FUREZ DUBRE
ELECTRIC GENERAL
TOTAL INGENIEROS S.A.C

WEIGUANG®


SPECIFICATION 规格说明
HANGZHOU WEIGUANG ELECTRONIC CO.,LTD.

LABEL (铭牌):


WEIGUANG® Axial Fan Motor
YWF4E-400S-102/47-G
220V 60Hz 1.20A 150/250W 1520r/min
6 μ F/450V CL.F XX/XX



WIRING DIAGRAM (接线图):



FLOW RATE CURVE (风量曲线):

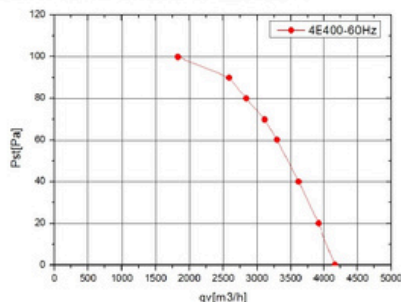

UNIT 类型	Axial fan motor 外转子轴流风机
MOTOR 电机型式	Single phase motor with capacitor
MOTOR TYPE 电机型号	YWF4E-400S-102/47-G
VOLTAGE 额定电压 (V)	220
FREQUENCY 频率 (Hz)	60
INPUT POWER 输入功率 (W)	250
CURRENT 电流 (A)	1.20
SPEED 转速 (r/min)	1520
AIR FLOW 风量20Pa (m³/h)	3911
NOISE 噪音 (dBA)	68
CAPACITOR 电容 (μ F/450V)	6
ROTATION 旋转方向	CW ,looking into the end-shield 顺时针, 从端盖端方向看
INSULATION CLASS 绝缘等级	F
MOTOR PROTECTION 电机保护	Thermocontact 150 $\pm$ 5 $^{\circ}$ C 热保护器
TEMPERATURE RISE 温升	75K max 运行温升不超过75K
PROTECTION CLASS 防护等级	IP54
OPERATING TYPE 工作定额	S1 连续工作制
AMBIENT TEMPERATURE 适用环境温度	-30 $^{\circ}$ C +60 $^{\circ}$ C
BEARINGS 轴承型式	Ball bearings 滚珠轴承
MOUNTING TYPE 安装方式	Horizontal or Vertical 垂直或水平安装
ELECTRICAL CONNECTION 电源线	Lead wire RV-90 4G 0.50mm ² , Length 100mm in terminal box connected 接线盒 (4芯0.5mm ² 线长100mm)
APPROVALS 认证标记	CCC、CE
NET WEIGHT/GROSS WEIGHT净重/毛重	6.0/7.0kg
PACKING 包装	43.5*43.5*20cm

						SIGN	DATE	TITLE
						DRN. BY		YWF4E-400S-102/47-G
						CHD. BY		
						ENG. BY		
						APP. BY		
REV.	DESCRIPTION	APPROVED	DATE					PROJECTION
								A4 SCALE SHEET: of