






WEIGUANG

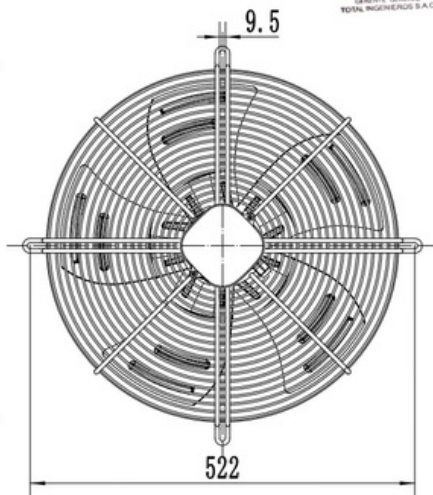


TOTAL INGENIEROS S.A.C
VENTAS, PROYECTOS, SERVICIOS EN INGENIERIA Y SISTEMAS DE REFRIGERACION

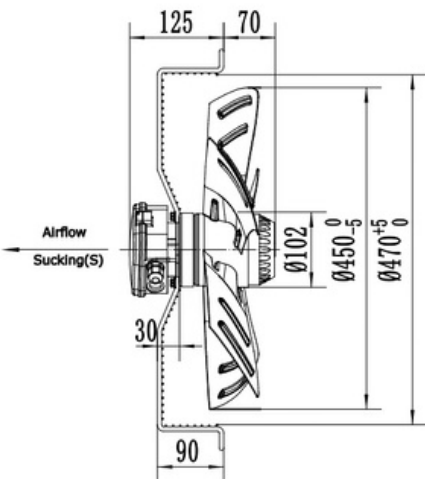


LABEL (铭牌):



WIRING DIAGRAM (接线图):

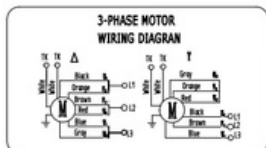

FLOW RATE CURVE (风量曲线):

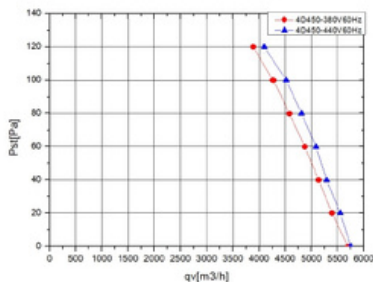

UNIT 类型	Axial fan motor 外转子轴流风机		
MOTOR 电机型式	Three phases motor		
MOTOR TYPE 电机型号	YWF4D-450S-102/60-G		
VOLTAGE 额定电压 (V)	△220	Y380	Y440
FREQUENCY 频率 (Hz)	60	60	60
INPUT POWER 输入功率 (W)	320	320	360
CURRENT 电流 (A)	0.97	0.56	0.62
SPEED 转速 (r/min)	1550	1550	1600
AIR FLOW 风量20Pa (m³/h)	5391	5391	5550
NOISE 噪音 (dBA)	70	70	70
ROTATION 旋转方向	CW ,looking into the end-shield 顺时针,从端盖端方向看		
INSULATION CLASS 绝缘等级	F		
MOTOR PROTECTION 电机保护	Thermocontact 150±5℃ 热保护器		
TEMPERATURE RISE 温升	75K max 运行温升不超过75K		
PROTECTION CLASS 防护等级	IP54		
OPERATING TYPE 工作定额	S1 连续工作制		
AMBIENT TEMPERATURE 适用环境温度	-30℃ +60℃		
BEARINGS 轴承型式	Ball bearings 滚珠轴承		
MOUNTING TYPE 安装方式	Horizontal or Vertical 垂直或水平安装		
ELECTRICAL CONNECTION 电源线	Lead wire 1330UL 7G 0.50mm²+2G 0.30mm² Length 100mm in terminal box connected 接线盒 (7芯0.5mm²+2芯0.3mm²线长100mm)		
APPROVALS 认证标记	CE		
NET WEIGHT/GROSS WEIGHT净重/毛重	8.0/9.0kg		
PACKING 包装	48.5*48.5*22cm		

						SIGN	DATE	TITLE YWF4D-450S-102/60-G
					DRN. BY			
					CHD. BY			
					ENG. BY			
REV.	DESCRIPTION	APPROVED	DATE		APP. BY			PROJECTION 
								A4 SCALE SHEET: of